M210F-5031KM

CONCEALED CISTERN w/ FLUSH ACTUATOR

Product Features

- Water-saving dual flush operation
- Front operated concealed cistern
- Dry wall or solid wall installation
- Impact resistant high density polyethylene tank

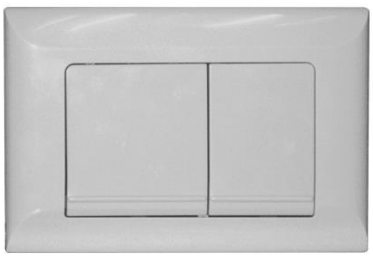

Product Specification

Front panel

- Dimension : 236(L) x 152(W) x 16(T) mm
- Material : ABS/ASA, grey

Cistern

- Dimension : Refer to the technical drawing below
- Material : HDPE
- Operating water pressure : 1.0 – 3 bars (static)
- Discharge volume : Nominal 3.5 - 6.0 Litres/ flush (full)
  : Nominal 2.5 - 3.0 Litres/ flush (reduced)

Applicable Products

- WH8014BP, WH7100BP, WH9030BP, WH3000BP, WH12000BP, WP9030BF, WP9031BF, WH5086BP, WP2915HBF, WP2913BF, WH2105BP, WH3800BP, WH5085BPA

Technical Drawing

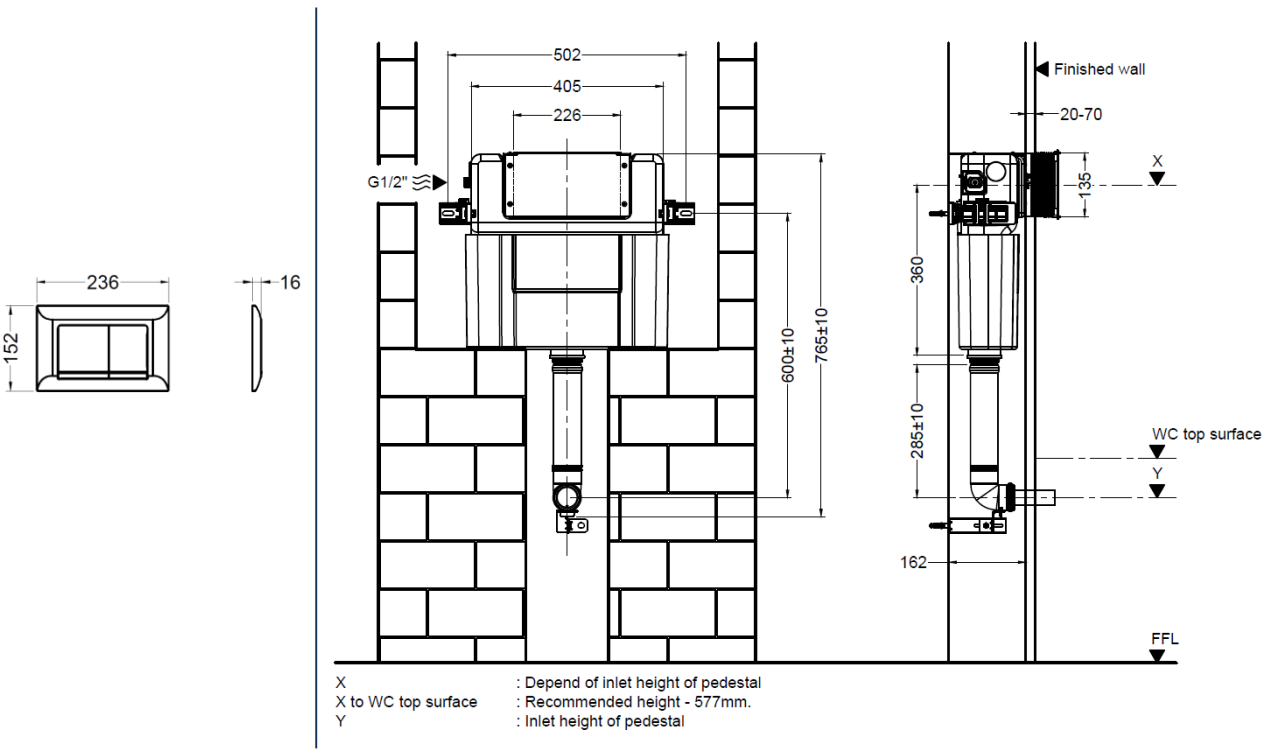

X : Depend of inlet height of pedestal
X to WC top surface : Recommended height - 577mm.
Y : Inlet height of pedestal

Copyright © RIGEL TECHNOLOGY (S) PTE LTD All rights reserved. Terms of Use.

Rev	1.0
Date	09.02.2022

DISCLAIMER : While every effort has been made to ensure factual accuracy, the information presented is subject to changes due to requirements in different sites, markets and / or countries. Rigel reserves the right to make the necessary amendments at any time without prior notice.

RIGEL INNOVATION CENTRE | No. 20 Changi Business Park Central 2 (S) 486031 **T** : (65) 6812 6288 **F** : (65) 6812 6388 **M** : sales@rigel-group.com **www.rigel.com.sg**